

ege

Una Tempo Stripe Tiles | Ecotrust 350, 100% Recycled

Productdescription



Una Tempo Stripe Tiles | Ecotrust 350, 100% Recycled

Productdescription



| DESCRIPTION | METHOD | DATA |
|-------------------------------------|------------------|--------------------------------|
| CONSTRUCTION CHARACTERISTICS | | |
| STRUCTURE | ISO 2424 | Tufted loop pile |
| GAUGE | ISO 2424 | 1/10 |
| PILE MATERIAL | DIR 96/73, 96/74 | Regenerated and regenerable PA |
| COLORATION | - | Solution dyed |
| BACKING | ETL | Ecotrust 350, 100% recycled |
| DIMENSIONS | ISO 3018 | 48x48/96x96/24x96cm/Figura |
| TOTAL THICKNESS | ISO 1765 | Apr 7,0 mm. |
| | - | 0.28" |
| SURFACE PILE THICKNESS | ISO 1766 | Apr 3,0 mm. |
| TUFTS | ISO 1763 | Apr 161.500 pr.m2 |
| TOTAL CARPET WEIGHT | ISO 8543 | Apr 2.525 g/m2 |
| | - | 70.8 oz./yd2 |
| PILE YARN WEIGHT | ETL | 500 g/m2 |
| | - | 14.75 oz./yd2 |
| SURFACE PILE DENSITY | ISO 8543. | Apr 0,100 g/cm3 |

| | | |
|------------------------------------|--------------------------------|-------------------------------|
| PERFORMANCE CHARACTERISTICS | | |
| PERFORMANCE AREAS | EN 1307 | Class 33 - Commercial - Heavy |
| GUARANTEE | ETL | Contract certificate |
| PERFORMANCE AREAS | Gulvbranchen | Class 33 |
| CASTOR CHAIR SUITABILITY | EN 985 | Intensive use |
| SUITABILITY FOR USE ON STAIRS | EN 1963 | Yes |
| STATIC CONTROL | ETL | Permanently antistatic |
| BODY WALKING TEST | ISO 6356 | Antistatic |
| ACOU.INSU. FROM IMPACT NOISE | ISO 717-2 | 25 dB |
| ACOUSTICAL ABSORPTION | ISO 354 | 0,25 aW |
| THERMAL INSULATION | ETL | Apr 0,12 m2K/W |
| LIGHT REFLECTANCE | ETL | Testreport |
| COLOUR FASTNESS TO LIGHT | ISO 105-B02 | >5 |
| | AATCC 16 | 5.0 |
| COLOUR FASTNESS TO RUBBING WET | ISO 105-X12 | >3 |
| | AATCC 165 | 5.0 |
| COLOUR FASTNESS TO RUBBING DRY | ISO 105-X12 | >3-4 |
| | AATCC 165 | 5.0 |
| COLOURFAST. TO WATER PATTERNED | ISO 105-E01 | >4 |
| CLEANING | AATCC 138 | 5.0 |
| COLOUR FAST.OXIDES OF NITROGEN | AATCC 164 | 5.0 |
| OTHER PERFORMANCE TESTS | ASTM D5252 Hexapod | 3.5/3.5 |
| | AATCC 134 Electrost.propensity | 2.0 kV |

Una Tempo Stripe Tiles | Ecotrust 350, 100% Recycled

Productdescription

SAFETY & ENVIRONMENT

| | | |
|----------------------------|--------------------------------|----------------------|
| FIRE CLASSIFICATION | ASTM E-648 | Class 1 |
| | ASTM E662 Smoke Density | <450 |
| | ASTM D2859 Surface Flamm. | Pass |
| | EN 13501-1 Euroclass | Bfl-s1 |
| CE LABELING | EN 14041 | Certified |
| | CPR | 1021-CPR-010-1/16 |
| | Declaration of Performance | DOP 5B-PA-ECT350 |
| | Notified body no. | 1021 |
| | Ce Year | 12 |
| | Content of PCP | DL |
| | Formaldehyde emission | NA |
| INDOOR CLIMATE | Slip resistance | Class DS |
| | M1 | With ECTA Backing |
| | Green Label Plus | Approved |
| | METS Report | Pass |
| | Emissions dans l'air intérieur | A+/A+ |
| | Indoor Air Comfort Gold | Group 3 |
| ENVIRONMENT | ABG | ABG-28-01-03-03-2018 |
| | Byggvarudeklaration | With ECTA Backing |
| | BASTA | Registered |
| | Byggvarubedömningen ID | 54078 (ECTA) |
| | SundaHus score | B (ECTA) |
| | BREEAM International | Approved |
| | BREEAM International | Approved |
| | BREEAM-NOR | Approved |
| | Environmental Product Decl. | MD-21083-EN |
| | Cradle To Cradle Certified | Bronze certified |
| | Recycled Content, ISO 14021 | Apr 14,0 % |
| Recycled Content for LEED | Apr 14,0 % | |
| GWP Cradle to Gate (A1-A3) | 11,00 KgCO2eq/m2 | |
| GWP Cradle to Grave (A-C) | 17,43 KgCO2eq/m2 | |

GUIDES

| | | |
|-------------------------------|---------------------------|--------------|
| INSTALLATION + ADHESIVE GUIDE | DK | Dansk |
| | N | Norsk |
| | S | Svensk |
| | GB | English |
| | D | Deutsch |
| | F | Francais |
| INSTALLATION TILES | Direction of installation | Quarter turn |
| CLEANING, STAIN REMOVAL | DK | Dansk |
| | N | Norsk |
| | S | Svensk |
| | GB | English |



Una Tempo Stripe Tiles | Ecotrust 350, 100% Recycled

Productdescription


| | |
|---|----------|
| D | Deutsch |
| F | Francais |

MANUFACTURER CHARACTERISTICS

| | | |
|-----------------------|-----------|-------------------------------|
| FACTORY CERTIFICATION | ISO 9001 | Audited and verified by BVC |
| | ISO 14001 | Audited and verified by BVC |
| | ISO 45001 | Audited and verified by BVC |
| | CRuk | Member of Carpet Recycling UK |

Una Tempo Stripe Tiles | Ecotrust 350, 100% Recycled

Productdescription

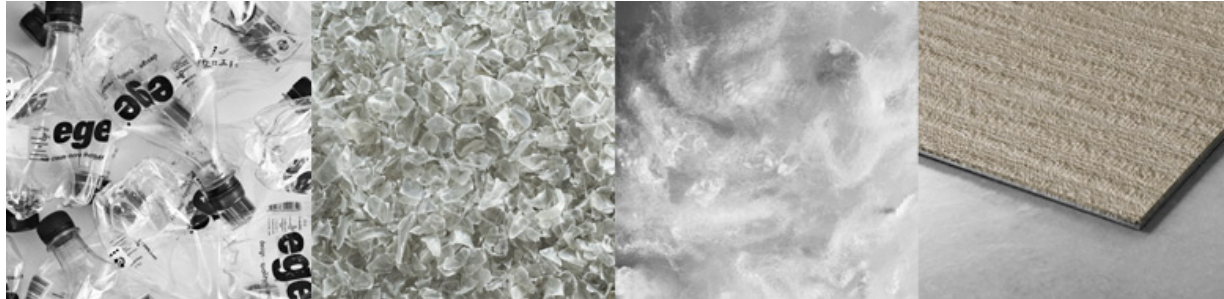

ECOTRUST

We use backings made from recycled plastic bottles

Some regard used plastic bottles as waste with no value. Others see them as “the source” of a vital resource that ensures survival and daily well-being. We take it a step further and regard used plastic bottles as a key ingredient in the manufacturing of our products. The plastic bottles are an important substance in our patented Ecotrust felt backing, with which all carpet tiles are equipped as standard and therefore also named after. The Ecotrust backing can also be chosen for selected wall-to-wall carpets.

With Ecotrust, you and your customer can specify a backing that takes the utmost consideration of the environment by finding a new and valuable use for a product that, seen in isolation, has come to the end of its life cycle. In doing so, you select a product which, without in any way compromising on design, function and quality, takes the utmost consideration of the only Earth we have. A planet that is not only important to us but also to future generations.

From used plastic bottles to carpet backing

Through an innovative manufacturing technique, used plastic bottles are first converted into plastic flakes and then into the soft fibres that are part of the PET-felt backing manufacturing process.

In addition to being made from recycled products, the felt has the eco-friendly quality of being regenerable. This means that after use, the felt can be broken down to its original chemical formula and become part of new PET products, for example, vehicle interiors and noise-reducing materials.

Outstanding acoustic properties and underfoot comfort

Our patented Ecotrust backing has more great features than just being the environmentally friendly choice for your floor projects. The soft felt material ensures optimum underfoot comfort in the rooms by creating a comfortable feel under the feet, which is neither too soft nor too yielding.

At the same time, the backings are so sturdy that they ensure optimum stability for the carpet tiles. This is important in terms of the quality of the tiling, including the nearly invisible joints that characterise our carpet tiles.

In addition, the Ecotrust backings feature unique acoustic advantages. For example, they reduce reverberations from speech and music very effectively. And the sound of footsteps is also absorbed by the soft material – not just in the individual room but also in the adjoining rooms. This is an advantage in office landscapes and hotels where many people move in close proximity, without it necessarily having to feel that way.

Most of our carpets are Cradle to Cradle Bronze Certified®

If you combine the Ecotrust backing with a carpet design crafted from the regenerated and regenerable yarn, you get a more sustainable carpet. The regenerated and regenerable yarns are based on used fishing nets and other industrial wastes which are converted into durable carpet yarns.

These carpets are Cradle to Cradle Certified®, and you are therefore guaranteed a carpet that is designed to be part of a closed-loop system that does not create waste – and which is made exclusively of materials that do not harm people and the environment.

We have a wide range of collections combining the Ecotrust backing with the regenerated and regenerable yarn, including all carpet tile collections from the ReForm family. The flat-woven collection Rawline Scala Tiles also falls into this category.

Una Tempo Stripe Tiles | Ecotrust 350, 100% Recycled

Productdescription



Most of our carpets are 100% Cradle to Cradle Bronze Certified®

We want to leave the right footprint and make sustainability available to everyone.

The Cradle to Cradle Certified Product Standard helps us do exactly that and therefore most of our carpets are Cradle to Cradle Bronze Certified®.

With this product certificate, we prove to the world that we do our utmost to keep valuable materials in circulation, cut down on waste and harmful substances, take better care of our scarce resources, sustain the groundwater, reduce CO2 emissions and ensure social fairness in our operations and value chain.

Ege Carpets is the no. 1 brand globally in terms of achieving the highest ever number of certifications in under five years.

Cradle to Cradle Certified® is the only choice

With our carpets, it's easier than ever before to choose sustainably. You can pick your very own favourite from thousands of colours, patterns, structures and qualities and in addition, many of our carpets are Cradle to Cradle Certified® which means that you can leave the people and planet care taking to us, while focusing your own attention on our great selection of designs.